




Thickness:	3.0 mm
Package:	200 sqft/roll
Underlayment	✓
Moisture Proof	✓

PRODUCT

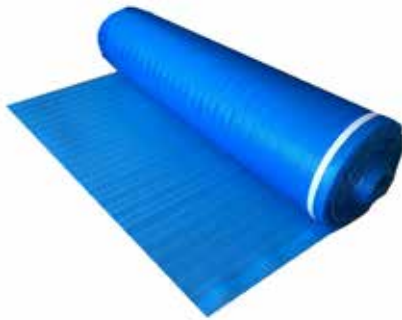

Moisture Barrier Attached:

eliminates bacteria, mold & mildews causing structural damage to flooring.

Self-Seal Tape System:

for easy installation.

Application:

laminated & engineered hardwood flooring, on all subfloors.

FEATURES

3.0mm

 DENSE, and closed-cell foam.
 MATERIAL

Moisture proof with antimicrobial coating

Designed for flooring underlayment

Subfloor heating compatible

FOOTSTEP NOISE MUFFLER
 CUSHIONING & sound absorption
 IMPACT NOISE

Environmentally friendly