


Thickness:	4.5 mm
Package:	100 sqft/roll
STC:	UP TO 86
IIC:	UP TO 84
FIIC	60
ΔIIC	32
Compression Strength:	7.3 PSI
Density:	9.36 lbs. per cu.ft

PRODUCT

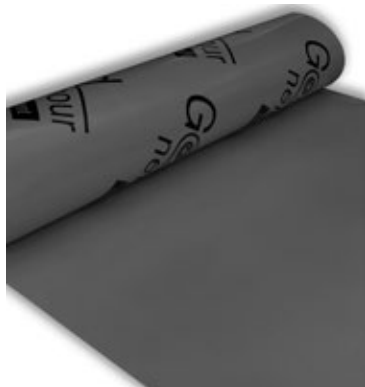

High-Density Crosslink IXPE Foam:

for best sound absorption and impact insulation, reduces minor sub-floor imperfections.

Superior Compression Strength:

provides stability and durability for high traffic areas.

Moisture Barrier Attached:

eliminates bacteria, mold & mildews causing structural damage to flooring.


Self-Seal Tape System:


for easy installation.


Application:


laminated & engineered hardwood flooring, on all subfloors.


FEATURES

4.5mm

 High-density EVA foam
 MATERIAL

 Moisture proof with antimicrobial coating

 Designed for Floating & Double Glue Down Installation Method

 Subfloor heating compatible

 Better impact insulation & noise absorption solution
 IMPACT NOISE

Actual product properties are subject to production and testing tolerances.

All tests are performed according to ASTM E492/ASTM E90.

All tests are performed with Unifloor's flooring products only. Good neighbour underlayment gives no guarantee of performance when combining flooring material from any other brand.

Product's datasheet can only reflect testing sample's average result from a specific production.

Good Neighbour underlayment reserves the right to adjust product's datasheet due to multiple factors. Please check out the most up to date information at www.goodneighbourunderlayment.com for the most updated product information.